


The Bentley Building  
 Dickinson Street  
 Oldham  
 Lancashire  
 OL4 1HD

**TEL.** 0161 627 5256  
**FAX.** 0161 620 6995

sales@interfacesolutions.uk.com




**INTERFACE  
 SOLUTIONS  
 UK LTD.**

[www.interfacesolutions.uk.com](http://www.interfacesolutions.uk.com)

**(IS M24)  
 24 VOLT MINI POLARISED RELAY**

This is the miniature version of the IS 24. The 24 volt polarised double pole relay is a simple to fit module wherever a dry contact, voltage free switching is required. It is ideal for low current low voltage switching i.e. Industrial control systems and many other applications. The double pole relay is rated at 2 Amps complete with LED indication. It is supplied as an individual unit or in a strip of 4 modules.

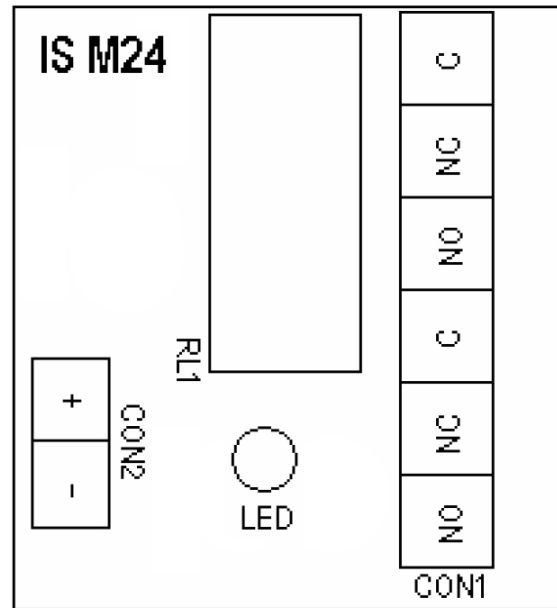

Supply Voltage	24 Volts DC
Coil Resistance	1280 Ohms
Nominal Current	30 mA
Double Pole Relay rate at	2 Amps at 30 V DC
Dimensions	Single: 37m (W) 37mm (L) 16mm (H)  Strip of 4: 37m (W) 150mm (L) 16mm (H)
Packing Weight	Single: 22g Strip of 4: 72g



We recommend IS Sticky Feet Size A, self-adhesive mounting pillars to ensure a neat fixing.



This product has passed the requirements for compliance