

The Bentley Building  
Dickinson Street  
Oldham  
Lancashire  
OL4 1HD

**TEL.** 0161 627 5256  
**FAX.** 0161 620 6995

sales@interfacesolutions.uk.com



**INTERFACE  
SOLUTIONS  
UK LTD.**

[www.interfacesolutions.uk.com](http://www.interfacesolutions.uk.com)

**(IS DRT)  
DELAY RELEASE TIMER**

This versatile 1-64 second / 1-15 minute DRT replaces the time adjustment potentiometer with an easy setting DIL switch for more accurate time setting.


Individual +ve & -ve terminals for both trigger and reset eliminate the need for jumper links to select polarity of both trigger and reset.

Auto voltage selection – just connect either 12 or 24volts DC to the power terminals and the DRT will do the rest.

Operating Voltage	10 - 24 Volts DC
Operating Conditions	-10°C to +60°C
Trigger and Reset	High: >5 V DC Low: <0.8 V DC
Relay Contacts	Min 10mA, Max 8A at 240V AC & 30V DC
Supply Input	Reverse polarity protected
Dimensions	56mm (W) 90mm (L) 18mm (H)
Packing Weight	50g

**Operating Modes:**

- Mode 1** Relay latches on after a trigger – requires a reset
- Mode 2** Relay on for the timed period after a momentary trigger. This time period can be cancelled at any time by applying a reset
- Mode 3** Relay on whilst trigger is present, stays on for timed period after trigger removed, timer resets if trigger re-applied during time period, – thus extending the time period

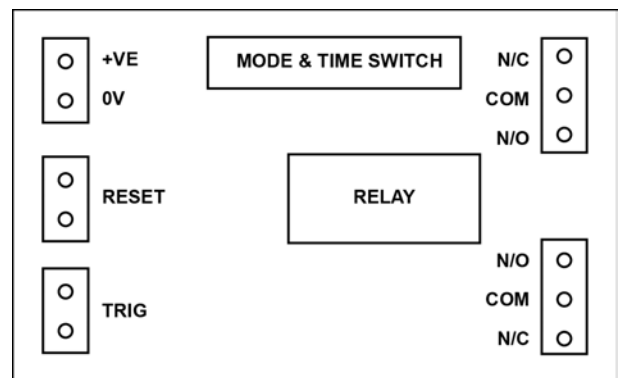

This product has passed the requirements for compliance