


The Bentley Building
Dickinson Street
Oldham
Lancashire
OL4 1HD

TEL. 0161 627 5256
FAX. 0161 620 6995

sales@interfacesolutions.uk.com




**INTERFACE
SOLUTIONS
UK LTD.**

www.interfacesolutions.uk.com

(IS M24T)
24 VOLT MINI TRANSISTORISED RELAY

This is the transistorised miniature version of the IS 24. It is a double pole relay complete with LED indication. It has been designed to allow low current, low voltage signalling outputs from control equipment to activate the relay without overloading the signalling circuits. The trigger voltage may be negative or positive and between 5 and 24 Volts with an approximate current drain of 4 mAmps. The trigger polarity is selected by a plug in link.

It is supplied as an individual unit or in strips of 4 modules.

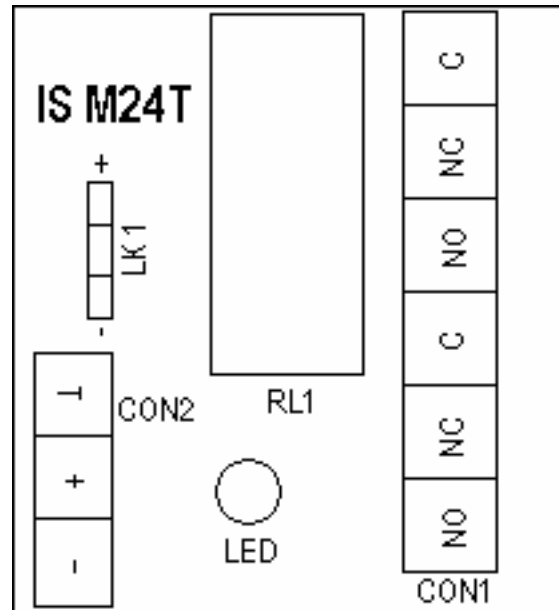

Supply Voltage	24 Volts DC
Trigger Voltage	5V – 24V
Trigger Current	4 mA
Nominal Current	30 mA
Coil Resistance	1100 Ohms
Double Pole Relay	2 Amps at 30 V DC rate at
Dimensions	Single: 37m (W) 37mm (L) 16mm (H) Strip of 4: 37m (W) 150mm (L) 16mm (H)
Packing Weight	Single: 24g Pack of 4: 74g

We recommend IS Sticky Feet Size A, self-adhesive mounting pillars to ensure a neat fixing.



This product has passed the requirements for compliance