


The Bentley Building
Dickinson Street
Oldham
Lancashire
OL4 1HD

TEL. 0161 627 5256
FAX. 0161 620 6995

sales@interfacesolutions.uk.com




**INTERFACE
SOLUTIONS
UK LTD.**

www.interfacesolutions.uk.com


**(IS M24)
24 VOLT MINI POLARISED RELAY**

This is the miniature version of the IS 24. The 24 volt polarised double pole relay is a simple to fit module wherever a dry contact, voltage free switching is required. It is ideal for low current low voltage switching i.e. Industrial control systems and many other applications. The double pole relay is rated at 2 Amps complete with LED indication. It is supplied as an individual unit or in a strip of 4 modules.

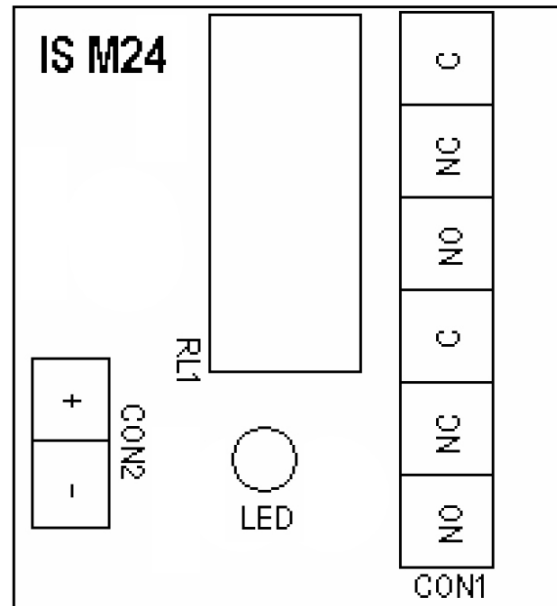

Supply Voltage	12 Volts DC
Coil Resistance	1100 Ohms
Nominal Current	60 mA
Double Pole Relay rate at	2 Amps at 30 V DC
Dimensions	Single: 37m (W) 37mm (L) 16mm (H) Strip of 4: 37m (W) 150mm (L) 16mm (H)
Packing Weight	Single: 22g Strip of 4: 72g

We recommend IS Sticky Feet Size A, self-adhesive mounting pillars to ensure a neat fixing.

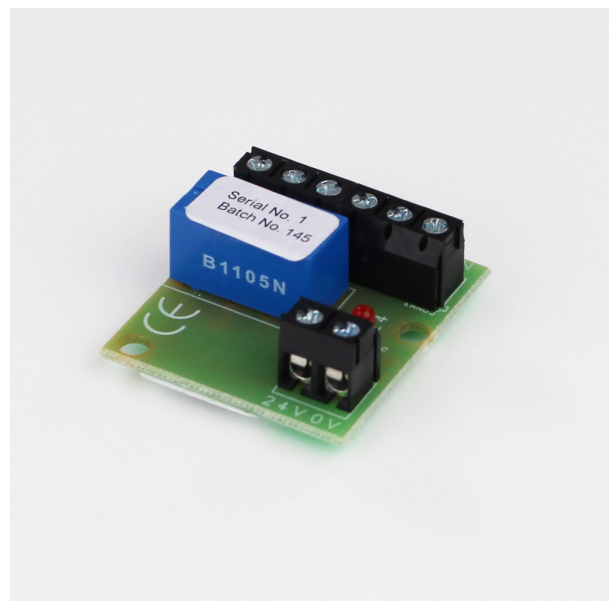

This product has passed the requirements for compliance