


The Bentley Building
 Dickinson Street
 Oldham
 Lancashire
 OL4 1HD

TEL. 0161 627 5256
FAX. 0161 620 6995

sales@interfacesolutions.uk.com



**INTERFACE
 SOLUTIONS
 UK LTD.**


www.interfacesolutions.uk.com

**(IS 24)
 24V POLARISED RELAY**


The 24 volt double pole relay is a simple to fit module wherever a dry contact, voltage free switching is required or where there is a need for higher than usual currents and voltages to be switched. The polarised function enables it to be used in Fire Alarm and similar systems where the polarity of the output to the bells, sounders etc. is reversed when in alarm.

Note:

Polarity must be correct for the relay to activate. The 24 Volt relay is mounted on a printed circuit board that has screwed terminals, complete with LED indication that the relay is activated.

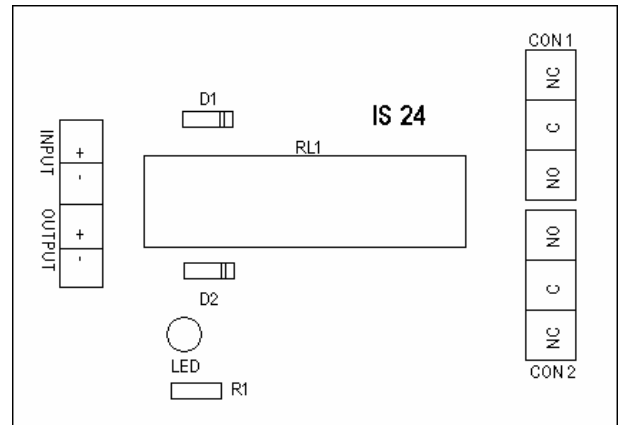

Supply Voltage	24 Volts DC
Coil Resistance	1440 Ohms
Nominal Current	25 mA
Double Pole Relay rate at	8 Amps at 240 V AC 8 Amps at 30 V DC
Dimensions	56mm (W) 69mm (L) 30mm (H)
Packing Weight	38g

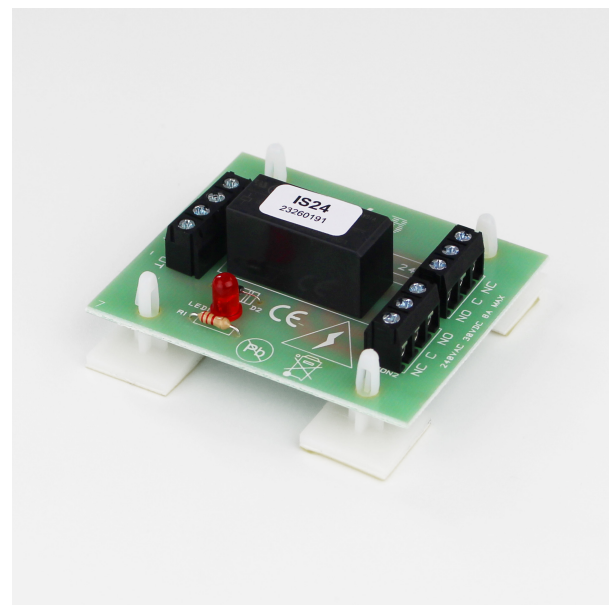

For a neat, easy and safe fixing we recommend the use of IS Sticky Feet Size B, a self adhesive mounting pillar.



This product has passed the requirements for compliance